

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
 - TEXT CUT OFF AT TOP, BOTTOM OR SIDES
 - FADED TEXT
 - ILLEGIBLE TEXT
 - SKEWED/SLANTED IMAGES
 - COLORED PHOTOS
 - BLACK OR VERY BLACK AND WHITE DARK PHOTOS
 - GRAY SCALE DOCUMENTS
-

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.


THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04B 1/13	A1	(11) International Publication Number: WO 95/34960 (43) International Publication Date: 21 December 1995 (21.12.95)
(21) International Application Number: PCT/US95/07379 (22) International Filing Date: 9 June 1995 (09.06.95) (30) Priority Data: 08/257,968 10 June 1994 (10.06.94) US (71) Applicant: VLSI TECHNOLOGY, INC. [US/US]; Legal Dept., 1109 McKay Drive, San Jose, CA 95132 (US). (72) Inventor: PANDULA, Louis; 1035 Katrine Ct., Sunnyvale, CA 94087 (US). (74) Agent: KING, Patrick, T.; Law Offices of Patrick T. King, 36 Seascape Village, Aptos, CA 95003 (US).		(81) Designated States: European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.

(54) Title: REDUNDANT RETRANSMISSION OF DIGITIZED VOICE DATA IN FREQUENCY HOPPING SYSTEM

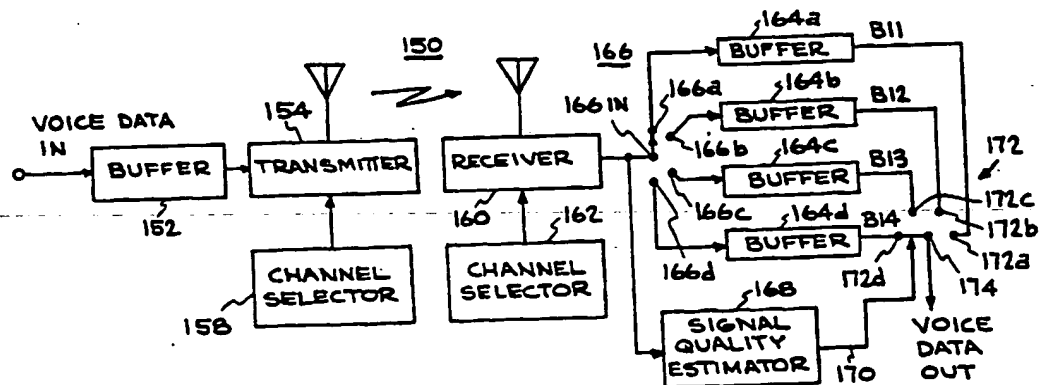

(57) Abstract

The technique of redundantly retransmitting digitized voice data on multiple sequential frequencies increases the channel bit rate above the minimum required for normal communication in a frequency-hopping communication system for digitized voice signals. Means are provided for redundantly retransmitting digitized voice data on multiple sequential frequencies and for increasing the channel bit rate above the minimum required for normal communication. Repeated transmissions of the same block of digitized voice data occurs n times at n times the bit rate of the original digitized voice data. A frequency-hopping transmitter (154) transmits on different channels, or carrier frequencies, which are modulated by the digitized voice data signals from a transmitter data buffer (152). A receiver data buffer (164) means holds n blocks of digitized voice data. A signal quality estimator (168) estimates which of the n blocks of digitized voice data has a desirable signal quality and selects the block of digitized voice data having the desirable signal quality at an output terminal (174) of the system.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

5

REDUNDANT RETRANSMISSION OF DIGITIZED VOICE DATA IN FREQUENCY
HOPPING SYSTEM.

10 BACKGROUND OF THE INVENTION

1. Technical Field. This invention relates to frequency-hopping
communication systems for wireless data communication of
digitized voice signals.

15

2. Prior Art. The use of frequency-hopping radio systems for
wireless data communication has become prevalent because of the
FCC rules governing unlicensed operation in the Industrial,
Scientific, and Medical (ISM) bands. Unfortunately, because of the
20 loosely regulated nature of these bands, there is a high likelihood that
radio systems operating in these ISM bands will interfere with each
other. Interference from other radio systems operating in these
bands along with various other transmission impairments, such as
multipath fading, make it difficult for these radio systems to obtain
25 bit error rates that are low enough to provide useful communication
services, particularly for digital transmission of voice signals.

One technique for overcoming these shortcomings for the ISM
bands for asynchronous data traffic is an Automatic Retry Request
30 (ARQ) error correction technique. With ARQ, the data information to
be sent from a source transmitter to a destination receiver is broken
up into smaller packets. Each of these smaller data packets is then
sent from the source to the destination over a single radio-frequency
channel. If an entire data packet is received correctly by the
35 destination, the destination sends a positive acknowledgment signal
back to the source. The source then sends the next data packet on a

different radio channel and the acknowledgment process is repeated. If the destination receives a data packet with errors, the destination can either not reply with an acknowledgment signal or reply with a negative acknowledgment signal. In either case, the source then
5 retransmits the data packet that was received in error on yet another radio frequency. This process is repeated until a data packet is received without errors and the source receives a positive acknowledgment.

10 With this ARQ retransmission/acknowledgment technique, all of the data packets comprising the original information are sent as many times as is necessary for error free reception. Note that, while the ARQ technique provides very low error rates, the ARQ technique cannot guarantee the maximum amount of time required to send the
15 information correctly.

For digital transmission of voice signals, much higher error rates can be tolerated than those required for the reliable transmission of data. However, transmission of voice signals require
20 that the communication channel guarantee a minimum information throughput and a maximum amount of delay time. The voice signals must be sent in near-real time without any major interruptions or time gaps to provide intelligible and satisfactory reproduction of the voice signals.

SUMMARY OF THE INVENTION

5 An object of this invention is to improve the bit error performance of a frequency hopping, radio communication system which is used for the transmission of digitized voice data.

10 In accordance with this and other objects of the invention, a frequency-hopping communication system and method is provided for digitized voice signals. The system includes means for redundantly retransmitting digitized voice data on multiple sequential frequencies and means for increasing the channel bit rate above the minimum required for normal communication. The invention takes advantage of this redundant retransmission of
15 digitized voice data on multiple sequential frequencies and increasing the channel bit rate above the minimum required for normal communication to provide improved bit error performance, guaranteed data throughput.

20 The frequency-hopping communication system for digitized voice signals includes transmission means for repeatedly transmitting the same block of digitized voice data n times at n times the certain bit rate where each transmission of the same block of digitized voice data is transmitted on a different carrier frequency.
25 The transmission means includes a frequency-hopping transmitter, which transmits on the different channels, or carrier frequencies, which are modulated by the digitized voice data signals from a transmitter data buffer. A receiver data buffer means holds n blocks of digitized voice data from a frequency-hopping receiver. A signal
30 quality estimator means is provided for estimating which of the n blocks of digitized voice data has a desirable signal quality. Means are included for providing the block of digitized voice data having the desirable signal quality at an output terminal of the system.

35 A frequency-hopping radio communication system for transmitting and receiving digitized voice signals according to the

invention includes transmitter data buffer means for collecting a block of digitized voice data, which has a certain original bit rate. Transmission means are provided for repeatedly transmitting the same block of digitized voice data n times at n times the original bit rate. Each transmission of the same block of digitized voice data is transmitted on a different carrier frequency using a frequency-hopping transmitter. The transmitter transmits on different predetermined carrier frequencies and is modulated by the digitized voice data signals from the transmitter data buffer means.

10

A receiver receives the signals transmitted from the frequency-hopping transmitter. A transmitter frequency selector provides the carrier frequency signals to the frequency-hopping transmitter and a receiver frequency selector provides receiver frequency signals to the frequency-hopping receiver for receiving and demodulating the output transmitted signals from the frequency-hopping transmitter. A multiplexed receiver data buffer holds n blocks of digitized voice data from the frequency-hopping receiver. A signal quality estimator estimates which of the n blocks of digitized voice data has the best signal quality. The block of digitized voice data having the best signal quality is provided at an output terminal of the system.

15
20

In one embodiment of the invention, the multiplexed receiver data buffer includes an input switch having an input terminal and a plurality of output terminals, wherein each output terminal of the input switch means is connected respectively to an input terminal of a data buffer. The multiplexed receiver data buffer also includes an output switch having an output terminal and a plurality of input terminals, wherein each input terminal of the output switch means is connected respectively to an output terminal of a data buffer.

25
30

The multiplexed receiver data buffer also includes an input switch having an input terminal and two output terminals, wherein each of the two output terminals of the input switch means is connected respectively to an input terminal of a data buffer means. The multiplexed receiver data buffer includes an output switch

35

having an output terminal and a two input terminals, wherein each input terminal of the two output switch means is connected respectively to an output terminal of a data buffer.

5 In another embodiment of the invention, the signal quality estimator includes means for determining when the receiver means receives an uncorrupted block of digitized voice data and means for transmitting each block of digitized voice data as many times as are necessary to provide an acceptable quality for a received block of
10 digitized voice signals as long as the number of retransmissions does not exceed the increase in the channel bit rate. Means are provided for notifying the transmitter to discontinue further retransmissions of the same block of digitized voice data and for the transmitter to remain idle until it is time to transmit the next block of digitized voice
15 signals.

The signal quality estimator means includes error detection means such as parity detection means or means for measuring the quality of a signal received by the receiver means such as edge-jitter
20 measuring means.

A method of communicating digitized voice signals through a frequency-hopping radio system is provided. In its broad aspects, the method includes the steps of increasing the channel bit rate by a
25 factor of n above the minimum required for normal communication and redundantly transmitting a block of digitized voice data at an n times bit rate on multiple sequential frequencies.

The invention includes a method of communicating digitized
30 voice signals over a frequency hopping communication system. The method includes the steps of: repeatedly transmitting the same block of digitized voice data n times at n times the original bit rate of the digitized voice data, where each transmission of the same block of digitized voice data is transmitted on a different carrier frequency;
35 receiving the output transmitted signals from the frequency-hopping transmitter; holding n blocks of digitized voice data from the

frequency-hopping receiver in a receiver data buffer; estimating which of the n blocks of digitized voice data has a desirable signal quality; and selecting and providing the block of digitized voice data having the desirable signal quality at an output terminal of the
5 system.

A more detailed method for transmitting and receiving digitized voice signals in a frequency-hopping radio communication system includes collecting a block of digitized voice data in a
10 transmitter data buffer, where said digitized voice data has a certain bit rate. The method also includes repeatedly transmitting the same block of digitized voice data n times at n times the certain bit rate where each transmission of the same block of digitized voice data is transmitted on a different carrier frequency, where said
15 transmission means includes a frequency-hopping transmitter, which transmits on the different predetermined carrier frequencies and which is modulated by the digitized voice data signals from the transmitter data buffer means, and which provides output transmitted signals.

20 The method includes providing the predetermined carrier frequency signals to the frequency-hopping transmitter with a transmitter frequency selector as well as providing predetermined frequency signals to the frequency-hopping receiver for receiving and
25 demodulating the output transmitted signals from the frequency-hopping transmitter with a receiver frequency selector synchronized to the transmitter frequency selector.

The method also includes holding n blocks of digitized voice
30 data from the frequency-hopping receiver, estimating which of the n blocks of digitized voice data has the best signal quality, and providing the block of digitized voice data having the best signal quality at an output terminal of the system.

35 The step of holding n blocks of digitized voice data from the frequency-hopping receiver includes the step of switchably

connecting data buffers to the output terminal of the frequency-hopping receiver and the step of switchably connecting one of two data buffers to the output terminal of the frequency hopping receiver and the step of selecting the block of digitized voice data having the
5 best signal quality.

The method includes the steps of determining when the receiver means receives an uncorrupted block of digitized voice data; transmitting each block of digitized voice data as many times as are
10 necessary to provide an acceptable quality for a received block of digitized voice signals as long as the number of retransmissions does not exceed the increase in the channel bit rate, and notifying the transmission means to discontinue further retransmissions of the same block of digitized voice data and for the transmission means to
15 remain idle until it is time to transmit the next block of digitized voice signals.

The step of estimating which of the n blocks of digitized voice data has the best signal quality includes detecting errors in a
20 received block of data. The step of detecting errors includes detecting parity errors or measuring the quality of a signal received by the receiver means, including measuring edge jitter.

Much greater power can be used with a frequency-hopping, spread-spectrum system according to the invention. This is
25 important in this type of service where transmitters are uncoordinated and the service is basically limited in its performance by interference from other users. The FCC has set rules which permit one watt of power for spread spectrum, i.e., frequency
30 hopping, in the ISM bands at 902-908 MHz and 2.4-2.483 GHz, etc. while only one milliwatt of power can be used for standard transmissions, without spread spectrum.

The reduction in bit error rate provided by the invention allows
35 the system to operate with good voice quality in the presence of radio interference and multipath fading.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The accompanying drawings, which are incorporated in and form a part of this specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention:

10 FIGURE 1 is a block diagram of a prior-art frequency-hopping radio system for voice communication which sends a block of data only once.

15 FIGURE 2 illustrates the use of different transmitter frequencies with the frequency-hopping radio system of Figure 1, where each frequency handles a different block of data.

FIGURE 3 is a block diagram of a frequency-hopping radio system for voice communication according to the invention.

20 FIGURE 4 illustrates a number of frequencies used with the frequency-hopping radio system of Figure 3, where each frequency handles one block of data.

25 FIGURE 5 illustrates the organization structure for frequencies, channels, and groups.

FIGURE 6 is a block diagram of an alternative embodiment of a frequency-hopping radio system for voice communication according to the invention.

30 FIGURE 7 is a block diagram of another alternative embodiment of a frequency-hopping radio system.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred
5 embodiments of the invention, examples of which are illustrated in
the accompanying drawings. While the invention will be described in
conjunction with the preferred embodiments, it will be understood
that they are not intended to limit the invention to these
embodiments. On the contrary, the invention is intended to cover
10 alternatives, modifications and equivalents, which may be included
within the spirit and scope of the invention as defined by the
appended claims.

FIGURE 1 is a block diagram of a prior-art frequency-hopping
15 radio system 100 for sending and receiving digitized voice
communications. For transmission over a frequency-hopping radio
system, a digitized voice signal is typically broken down into a
number of relatively short time segments. For each time segment, a
block of voice data is collected in a data buffer 102 and then
20 transmitted on a single radio frequency from a transmitter 106 while
the next block of voice data is being collected in the data buffer 102.
Input voice data is received at an input terminal 106 of the data buffer
102, which holds one block of digitized voice data. The output signals
of the data buffer 102 are fed into the input terminals of a transmitter
25 104, which is modulated on a carrier frequency by the data signals.
The carrier frequencies for the transmitter 104 are provided by a
carrier frequency selector circuit 108, which includes, for example, a
frequency synthesizer which provides a particular carrier frequency
for the length of one block of voice data. The carrier frequencies are
30 periodically changed in a pseudo random pattern to provide
frequency-hopping for the system.

FIGURE 2 illustrates the use of a different transmitter
frequency for each block of data.

Referring to Figure 1, the transmitted signal from the transmitter 104 is received and demodulated by a receiver circuit 110, which is tuned to an appropriate received carrier frequency with a receiver frequency selector circuit 112. The frequencies of the receiver frequency selector circuit 112 are coordinated with the transmitter frequencies according to a conventional frequency-hopping protocol which includes acquisition and maintenance of frequency and timing synchronization. The received data signals are stored in a receiver buffer 114. The signals from the buffer 114 are fed out as the digital voice output signals. The receiver circuits accepts each block of voice data without correction or alteration. As long as severe interference is not present in the link between the transmitter and the receiver so that the radio signal at the destination is received intact, the bit error rate for the received data signals remains low enough to provide faithful reproduction of the original voice signal. A block of voice data whose bit error rate is higher than what is required for good voice intelligibility is defined as a corrupted block of voice data.

Referring to Figure 2, Block 3 of data is designated as having errors, which are caused by degraded transmission conditions, such as channel interference from other users within the frequency band. If errors occur in the course of transmission, the reproduced voice at the destination receiver is degraded. For ADPCM (Adaptive Differential Pulse Code Modulation) encoded voice at 32 kilobits per second, the effects of data error rates below 0.1% are unnoticeable in the reproduced voice signals. Data error rates as high as 1% still provide for intelligible speech reproduction.

The invention includes blocking the digitized voice data bits, repeating a block n times, and estimating the signal quality of each block of bits.

The following example is used to illustrate the effect of channel interference on error rates for the prior art system described in connection with Figure 1. A frequency hopping radio operates on 208

different carrier frequencies. The order in which the frequencies are selected is determined by an appropriately provided pseudo-random list. Once all of the frequencies in the list have been used once, the list is repeated or another list with a different ordering of the same frequencies may be used. The voice data is broken up into short, equal length blocks with each block sent on one of the 208 frequencies. Assume that signals on 12 of the 208 frequencies are corrupted by interference and that the corresponding blocks of voice data are in error. Since 12 out of 208 blocks are received with errors, a block error rate of 5.8% results. If no means of error correction is provided for the bits within an erroneous block, the bit error rate for all of the bits within that block is also 5.8%. This bit error rate is too high to provide useful voice communication.

From the simple example above, it is apparent that a relatively small number of corrupted frequencies can have a significant effect on the ability of this prior art frequency-hopping system to provide intelligible voice communication.

FIGURE 3 is a block diagram of an improved frequency-hopping radio system 150 for sending and receiving digitized voice communications according to the invention. The digitized voice signal is organized into a number of relatively short time segments, called blocks. For example, a block of ten bits has a one millisecond period with each data bit having a 10 kilobit data rate. Each block of voice data is collected in a transmitter data buffer 152. In this system, a block of voice data collected in the transmitter data buffer is transmitted n times by a frequency hopping transmitter 154 using its associated channel frequency selector 158. The bit rate for the transmitted data is n times the data rate of the original digitized voice signals. While ten bits per block is described for illustration purposes, block lengths typically are on the order of one to several hundred bits in length. Blocks may also include error detection and correction bits.

The channel bit rate for this improved frequency-hopping system is increased by an integer multiple factor above the data rate for the voice information and any system overhead data bits. A factor of four is used in this illustrative example. This increases the
5 channel bit rate by a factor of four and sends each block in a fraction of the time normally required. Each block of digitized voice data is sequentially transmitted on four different channels. A transmitter channel for a multiply-transmitted block of digitized voice information according to the invention requires an increased
10 bandwidth to support the higher channel bit rate. The bandwidth of a channel now covers the band occupied by four frequencies for a conventional frequency hopping system such as described in connection with Figure 1.

15 The F.C.C. permits one watt of power for spread spectrum, i.e., frequency hopping, in the ISM bands at 902-908 MHz, 2.4-2.483 GHz, and other bands. Only one milliwatt of power can be used for standard transmissions, without spread spectrum or frequency hopping. Much greater power can be used with a frequency-hopping,
20 spread-spectrum system according to the invention. This is important in this type of service where transmitters are uncoordinated and the service is basically limited in its performance by interference from other users.

25 Data from the transmitter data buffer 152 is sequentially transmitted on the four different channels, while the next block of voice data is simultaneously being collected in the data buffer 152. The data buffer 152 is designed so that the contents of the data buffer 152 are transmitted four times at the higher rate while new input
30 data for a subsequent block of digitized voice data at the lower data rate is being collected in the data buffer.

The output signals of the data buffer 152 are fed into the input terminals of the transmitter 154 and modulated onto the four
35 sequentially provided carrier frequencies. The four different carrier frequencies for the transmitter 154 are provided by the carrier

frequency selector circuit 158. The carrier frequency selector includes, for example, a frequency synthesizer which sequentially provides the four carrier frequencies for each block of data. The carrier frequencies are periodically changed in a predetermined pseudo-random pattern to provide frequency-hopping.

FIGURE 4 diagrammatically illustrates the assignment of four transmitter channels to each repeated data blocks for the frequency-hopping radio system of Figure 3.

For this example, Channels 1 through 4 sequentially transmit the same block of digitized voice data B₁, which is identified in the Figure as B_{1,1} for Channel 1, B_{1,2} for Channel 2, B_{1,3} for channel 3, and B_{1,4} for Channel 4. Block 1,2 is illustrated as having errors. Similarly, Channels 5 through 8 sequentially transmit another block of digitized voice data B₂, which is identified in the Figure as B_{2,1} for Channel 5, B_{2,2} for Channel 6, B_{2,3} for channel 7, and B_{2,4} for Channel 8.

Referring back to Figure 3, the transmitted signal from the transmitter 154 is received and demodulated by a receiver circuit 160, which is tuned to an appropriate received carrier frequency with a receiver frequency selector circuit 162. The frequencies of the receiver frequency selector circuit 162 are coordinated with the transmitter frequencies according to a frequency-hopping protocol.

The received data information for each sequentially transmitted block are respectively stored in a parallel receiver buffer arrangement 164, which includes four buffers 164a, 164b, 164c, 164d each of which has a length of 1 block of digitized voice data. An input selection switch 166 has an input terminal 166_{in} and four output terminals 166a, 166b, 166c, 166d. The switch is operated in synchronization with the channel selector 162 so that the input terminal 166_{in} is connected to a respective output terminal 164a, 164b, 164c, 164d. In this manner, the data block B_{1,1} is fed into the buffer 164a; the data block B_{1,2} is fed into the buffer 164b; the data block B_{1,3}

is fed into the buffer 164c; and the data block B_{1,4} is fed into the buffer 164d.

The receiver 160 receives the four redundant copies of each
5 block of digitized voice data. A signal quality estimator circuit 168 is connected to the output terminal of the receiver 160. The signal quality estimator circuit 168 determines which of the four received blocks of digitized voice data has the fewest impairments and selects that block and, in effect, discards those blocks that have been
10 corrupted. The selection operation is performed by the signal quality estimator 168 which provides an output control signal indicative thereof on control line 170. A buffer output selection switch 172 has four input terminals: terminal 172a is connected to the output terminals of buffer 164a for block B_{1,1}, terminal 172b is connected to
15 the output terminals of buffer 164b for block B_{1,2}, terminal 172c is connected to the output terminals of buffer 164c for block B_{1,3}, and terminal 172d is connected to the output terminals of buffer 164d for block B_{1,4}. The output control signal of the signal quality estimator 168 on control line 170 selects one of the input terminals of the switch
20 172 to be connected to an output terminal 174. Terminal 174 provides the best block of voice data information to a user. As long as one copy of each block of digitized voice data is received with minimal impairment, this system provides sufficiently low bit error rates even in the presence of interference.

25

The signal quality estimator can be implemented in a number of ways. For example, each of the voice data blocks can include extra parity or error detection bits. The demodulated data bits can also be monitored for edge jitter to provide a signal indicative of the quality of
30 the received voice data.

FIGURE 5 illustrates the retransmissions of Block B₁ by Channels B_{1,1}, B_{1,2}, B_{1,3}, B_{1,4}. Input Block B₁ has a time period of 1 millisecond and has 10 data bits at an input bit rate of 10 kbits/sec.
35 Each time-compressed channel sends the same number of bits as an

input block but has a higher bit rate of 40 kbits/sec. A block of input data is repeated four times in one millisecond.

Because the channel bit rate is increased by a factor of four,
5 this requires four times the transmission bandwidth for the retransmissions of the bits for each block. Thus, the retransmission of each block of data at the higher bit rate now requires a transmission bandwidth which includes the four narrower frequency bands associated with the original transmission
10 frequencies for the lower bit rate prior art system. For example, frequencies f1 through f4 are within Channel B1,1, which occupies a bandwidth covering frequencies f1, f2, f3, f4. Four of the channels are organized to send a block of the original data four times. Channel B1,3, 4 occupies Frequencies f 205-208.

15

If the original system uses 208 different frequencies, which are distributed over a service band, the bandwidth allocated for these frequencies will provide 52 channels for a time-compressed, retransmission system according to the invention. For a
20 retransmission system according to the invention, each block of input data uses 4 channels covering 16 of the original frequency bands, so that 13 blocks of data can be retransmitted using the frequency bandwidths allocated for the 208 different frequencies of the service bandwidth. Each channel has a bandwidth which covers 4 of the
25 original frequencies used in the prior art system. If certain ones of the 208 frequency bands are corrupted by interference, we assume that the digitized voice data transmitted through a channel encompassing one of these corrupted frequencies will be in error and not useful for reproduction of a voice signal. The bandwidths
30 associated with each of these 208 frequencies is periodically used by frequency hopping systems. A block of digitized voice signals may include, if appropriate, parity/error detection bits or other system overhead bits.

35 The performance improvement achievable using the invention is illustrated with numerical examples which compare the original

“uncorrected” block error rate of the prior art system of Figure 1 with the “corrected” block error rate of a system according to the present invention. A block is defined as having, for example, ten bits. The total block error rate is equal to the sum of the error rates for one, two, three, etc. blocks in error. The combinations for two or more blocks being in error are less than for just one block in error.

If 4 frequency bands are corrupted:

$$\text{The uncorrected block error rate} = \frac{4}{208} = 1.9 \times 10^{-2}$$

10

The corrected block error rate

$$= \frac{1}{\frac{208!}{4!(208-4)!}} \times 256 \times 13 \times \frac{1}{13} = 3.4 \times 10^{-6}$$

If 8 frequency bands are corrupted:

$$\text{The uncorrected block error rate} = \frac{8}{208} = 3.9 \times 10^{-2}$$

15

The corrected block error rate for 2 blocks in error =

$$\frac{1}{\frac{208!}{8!(208-8)!}} \times 256^2 \times \frac{13!}{2!(13-2)!} \times \frac{1}{13} \times 2 = 1 \times 10^{-8}$$

The corrected block error rate for 1 block in error =

20

$$\frac{1}{\frac{208!}{8!(208-8)!}} \times 256 \times \left(\frac{204!}{4!(204-4)!} - 256.12 \right) \times 13 \times \frac{1}{13} = 2.36 \times 10^{-4}$$

If 12 frequency bands are corrupted:

$$\text{The uncorrected block error rate} = 5.8 \times 10^{-2}$$

25

The corrected block error rate for 3 blocks in error =:

$$\frac{1}{\frac{208!}{12!(208-12)!}} \times (256)^3 \times \frac{13!}{3!(13-3)!} \times \frac{1}{13} \times 3 = 1 \times 10^{-10}$$

The corrected block error rate for 2 blocks in error =

$$\frac{1}{12!(208-12)!} \times (256)^3 \times \frac{13!}{3!(13-3)!} \times \frac{1}{13} \times 3 = 5.1 \times 10^{-6}$$

5

The corrected block error rate for 1 block in error =

$$\frac{1}{12!(208-12)!} \times 256 \times \left(\frac{204!}{8!(204-8)!} - (256 \left(\frac{200!}{4!(200-4)!} - 256.11 \right)) \times 12 - (256)^2 \times \frac{12!}{2!(12-2)!} \right) \times 12 \times \frac{1}{13} = 1.5 \times 10^{-3}$$

10 Under condition where a conventional system would provide voice quality where the reproduced voice signal is barely intelligible, the present invention provides voice quality which is close to that available with a conventional system without any channel impairments.

15 FIGURE 6 is a block diagram of an alternative embodiment of a frequency-hopping radio system 200 for voice communication according to the invention. In this embodiment block retransmission of a block of data occurs using several different frequencies in a manner similar to that described in connection with
20 Figure 3 herein above.

As previously described, a digitized voice signal is broken down into a number of relatively short time segments and collected in blocks. For each time segment, a block of voice data is collected in a
25 transmitter data buffer 202. The block of voice data in the transmitter data buffer 202 is transmitted a number of times at an integer multiple of the bit rate by a frequency hopping transmitter 204 using its associated channel frequency selector 206.

30 The repeated transmission of the block of data occurs in the same amount of time that is available for collection of information in

the data block. The channel bit rate is increased by an integer multiple factor above the data rate for the voice information and any system overhead data bits. A factor of four is used in this illustrative example. This increase in the channel bit rate by a factor of four, for
5 example, sends each block to be sent in a fraction of the time normally required. Each block of digitized voice data is sequentially transmitted on four different channel frequencies. A transmitter channel for a multiply-transmitted block of digitized voice information now includes four different frequencies and requires an
10 increased bandwidth to support the higher channel bit rate.

The transmitted signal from transmitter 204 is received and demodulated by a receiver circuit 210, which is tuned to an appropriate received carrier frequency with a receiver frequency
15 selector circuit 212. The frequencies of the receiver frequency selector circuit 212 are coordinated with the transmitter frequencies according to a predetermined frequency-hopping protocol.

The received data information for each sequentially
20 transmitted block are stored in a set of receiver buffers, which includes Buffer A 220 and Buffer B 222 each of which has a length of 1 block of digitized voice data.

A buffer input selection switch 226 has an input terminal 228
25 connected to the output terminal of the receiver 210. The buffer input selection switch 226 has two output terminals A_{in}, B_{in}. Terminal A_{in} is connected to the input terminal of Buffer A 220. Terminal B_{in} is connected to the input terminal of Buffer B 222.

30 An output selection switch 230 has two input terminals A_{out}, B_{out}. Terminal A_{out} is connected to the output terminal of Buffer A 220. Terminal B_{out} is connected to the output terminal of Buffer B 222. The output terminal 232 of the switch 230 provides voice data out to a user.

The switch 226 is controlled by a control signal provided from a signal quality estimator circuit 240 on a signal line 242. The switch 230 is controlled by a control signal provided from the signal quality estimator circuit 240 on a signal line 244. The signal quality estimator circuit 240 has its input terminal connected to the output terminal of the receiver 210. The signal quality estimator circuit 240 determines the quality of the signal received for a given frequency and provides the control signals to the switches 226, 230.

Figure 4 diagrammatically also illustrates a channel arrangement which can also be used with the frequency-hopping radio system of Figure 6. For this example, Channels 1 through 4 sequentially transmit the same block of digitized voice data, which is identified in the Figure as B_{1,1} for Channel 1, B_{1,2} for Channel 2, B_{1,3} for channel 3, and B_{1,4} for Channel 4. Block 1,2 is identified as having errors.

Referring to Figure 6, the signal quality estimator circuit 240 operates as follows: When block B_{1,1} is being received, the switches are in positions A_{in}/A_{out}. When block B_{1,2} is being received, the switches are in positions B_{in}/B_{out}. When block B_{1,3} is being received, the switches are set to positions A_{in}/A_{out} if the quality of the signal for the contents of Buffer A is less than the quality of the signal for the contents of Buffer B, otherwise the switches are in positions B_{in}/B_{out}. When block B_{1,4} is being received, the switches are set to positions A_{in}/A_{out} if the quality of the signal for the contents of Buffer A is less than the quality of the signal for the contents of Buffer B, otherwise the switches are in positions B_{in}/B_{out}.

The switches are operated in synchronization with the channel selector 212. The frequencies of the receiver frequency selector circuit 112 are coordinated with the transmitter frequencies according to a frequency-hopping protocol.

FIGURE 7 shows another embodiment of a system according to the invention. The system is another improved

frequency-hopping radio system 250 for sending and receiving digitized voice communications according to the invention. This system is implemented in a duplex system which provides time division multiplexing TDM for transmit and receive functions from
5 the same site. The digitized voice signal is organized into block of ten bits and has a one millisecond period with each data bit having a 10 kilobit data rate. Each block of voice data is collected in a transmitter data buffer 252. A block of voice data collected in the transmitter data
10 buffer 252 is transmitted n times by a frequency hopping transmitter 254 using its associated channel frequency selector 258. The bit rate for the transmitted data is n times the data rate of the original digitized voice signals. Each block of digitized voice data is sequentially transmitted in four different channels to accommodate the increased bandwidth required to support the higher channel bit
15 rate according to the invention.

Data from the transmitter data buffer 252 is sequentially transmitted on multiple radio frequencies from the transmitter 154, while the next block of voice data is simultaneously being collected in
20 the data buffer 152. The data buffer 252 is designed so that the contents of the data buffer 252 are transmitted four times at the higher rate while new input data for a subsequent block of digitized voice data at the lower data rate is being collected in the data buffer.

25 The output signals of the data buffer 252 are fed into the input terminals of the transmitter 254 and modulated onto the four carrier frequencies for each channel. The four different carrier frequencies for the transmitter 254 are provided by the carrier frequency selector circuit 258. The carrier frequency selector includes, for example, a
30 frequency synthesizer which sequentially provides the four different channel frequencies for each block of data. The carrier frequencies are periodically changed in a predetermined pseudo-random pattern to provide frequency-hopping.

35 The transmitted signal from the transmitter 254 is received and demodulated by a receiver circuit 260, which is tuned to an

appropriate received channel frequency with a receiver frequency selector circuit 262. The frequencies of the receiver frequency selector circuit 262 are coordinated with the transmitter frequencies according to a frequency-hopping protocol.

5

The received data information for each sequentially transmitted block are stored in a receiver buffer arrangement 264 which has a length of 1 block of digitized voice data. The receiver 260 receives a block of digitized voice data. A signal quality estimator circuit 268 is connected to the output terminal of the receiver 260. The
10 signal quality estimator circuit 268 determines that a received block of digitized voice data has minimal impairments. An output control signal from the signal quality estimator 268 on control line 270 indicates that a received block of data is acceptable.

15

In this embodiment of the invention, the destination signal quality estimator 268 sends a positive acknowledgment signal on a control line 272 to the source transmitter 254. The positive acknowledgment signal is provided when the output control signal
20 from the signal quality estimator 268 is present on control line 270. A communication link for this acknowledgment process is provided by a transmitter 272 and receiver 274. Upon receipt of a control signal on line 272, the source transmitter 254 discontinues further retransmissions of the same block and remains idle until it is time to
25 transmit the next new input block of digitized voice signals from buffer 252. Each block is sent as many times as are necessary, up to n times, to provide an error-free, or minimally impaired, received block of digitized voice signals. This system is effective as long as the number of retransmissions does not exceed n . A benefit of this
30 approach is that the radio system transmits a smaller percentage of the time when it encounters little interference and thus it creates less interference to other systems sharing the same frequencies.

The performance of the invention can be further improved by
35 selecting the channel frequencies using long pseudo random lists. If short lists are used, continuous interference in a particular channel

can result in block errors that are periodic in nature. In effect, the block errors repeat at the period of the frequency list. Even if the fundamental frequency corresponding to this period is not in the audible frequency range, its harmonics may have sufficient power to
5 generate considerable audible noise. Because this type of noise manifests itself as tones, or signals with constant frequencies, it is more objectionable to the listener than a spectrally smooth white noise of equal power. Pseudo random lists with very long repetition times, on the other hand, cause block errors to appear more random
10 in nature. The fundamental frequency corresponding to this very long period is low enough in frequency that its harmonics are so closely spaced that they resemble white noise and thus are less noticeable to the listener.

15 The invention is practiced using conventional circuit elements interconnected and cooperating as described herein above. Alternatively, this invention is also practiced using digital signal processing DSP techniques with hardware such as provided by a general purpose integrated digital signal processor programmed to
20 perform the functions described herein above.

The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the
25 invention to the precise forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize
30 the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

IN THE CLAIMS:

1. A frequency-hopping communication system for digitized
5 voice signals, comprising:
 means for redundantly retransmitting a block of digitized voice
 data on multiple frequencies; and
 means for estimating at a receiver the signal quality of each
 retransmitted block of digitized voice data;
10 means for selecting the retransmitted block having the best
 quality.
2. A frequency-hopping communication system for digitized
voice signals, comprising:
15 transmission means for repeatedly transmitting the same
 block of digitized voice data n times at an increased bit rate over the
 original block bit rate, where each transmission of the same block of
 digitized voice data is transmitted on a different carrier frequency,
 and where said transmission means includes a frequency-hopping
20 transmitter, which transmits on the different predetermined carrier
 frequencies and which is modulated by the digitized voice data
 signals from a transmitter data buffer means, and which provides
 output transmitted signals;
 receiver means for receiving the output transmitted signals
25 from the frequency-hopping transmitter;
 receiver data buffer means for holding n blocks of digitized
 voice data from the frequency-hopping receiver;
 signal quality estimator means for estimating which of the n
 blocks of digitized voice data has a desirable signal quality; and
30 means for providing the block of digitized voice data having the
 desirable signal quality at an output terminal of the system.
3. A frequency-hopping radio communication system for
transmitting and receiving digitized voice signals, comprising:
35 transmitter data buffer means for collecting a block of digitized
 voice data, where said digitized voice data has a certain bit rate ;

transmission means for repeatedly transmitting the same block of digitized voice data n times at n times the certain bit rate where each transmission of the same block of digitized voice data is transmitted on a different carrier frequency, where said

5 transmission means includes a frequency-hopping transmitter, which transmits on the different predetermined carrier frequencies and which is modulated by the digitized voice data signals from the transmitter data buffer means, and which provides output transmitted signals;

10 a transmitter frequency selector means for providing the predetermined carrier frequency signals to the frequency-hopping transmitter;

receiver means for receiving the output transmitted signals from the frequency-hopping transmitter;

15 a receiver frequency selector means for providing predetermined frequency signals to the frequency-hopping receiver for receiving and demodulating the output transmitted signals from the frequency-hopping transmitter;

20 multiplexed receiver data buffer means for holding n blocks of digitized voice data from the frequency-hopping receiver;

signal quality estimator means for estimating which of the n blocks of digitized voice data has the best signal quality; and

means for providing the block of digitized voice data having the best signal quality at an output terminal of the system.

25

4. The system of Claim 3:

wherein the multiplexed receiver data buffer means includes an input switch having an input terminal and a plurality of output terminals, wherein each output terminal of the input switch means
30 is connected respectively to an input terminal of a data buffer means; and

wherein the multiplexed receiver data buffer means includes an output switch having an output terminal and a plurality of input terminals, wherein each input terminal of the output switch means
35 is connected respectively to an output terminal of a data buffer means.

5. The system of Claim 3:

wherein the multiplexed receiver data buffer means includes
5 an input switch having an input terminal and two output terminals,
wherein each of the two output terminals of the input switch means
is connected respectively to an input terminal of a data buffer means;
and

wherein the multiplexed receiver data buffer means includes
10 an output switch having an output terminal and a two input
terminals, wherein each input terminal of the two output switch
means is connected respectively to an output terminal of a data buffer
means.

15 6. The system of Claim 3 wherein:

the signal quality estimator includes means for determining
when the receiver means receives an uncorrupted block of digitized
voice data;

means for transmitting each block of digitized voice data as
20 many times as are necessary to provide an acceptable quality for a
received block of digitized voice signals as long as the number of
retransmissions does not exceed the increase in the channel bit rate.

means for notifying the transmission means to discontinue
further retransmissions of the same block of digitized voice data and
25 for the transmission means to remain idle until it is time to transmit
the next block of digitized voice signals.

7. The system of Claim 3 wherein the signal quality estimator
means includes error detection means.

30

8 The system of Claim 7 wherein the error detection means
includes parity detection means.

9. The system of Claim 3 wherein signal quality estimator
35 means includes means for measuring the quality of a signal received
by the receiver means.

10. The system of Claim 3 wherein the means for measuring the quality of a signal received by the receiver means includes edge-jitter measuring means.

5

11. A method of communicating digitized voice signals through a frequency-hopping radio system, comprising the steps of:

increasing the channel bit rate by a factor of n above the minimum required for normal communication; and

10

redundantly transmitting a block of digitized voice data at an n times bit rate on multiple sequential frequencies.

15

12. A method of communicating digitized voice signals over a frequency hopping communication system, comprising the steps of:
repeatedly transmitting the same block of digitized voice data n times at an increased bit rate over the original rate of the digitized voice data, where each transmission of the same block of digitized voice data is transmitted on a different carrier frequency;

20

receiving the output transmitted signals from the frequency-hopping transmitter;

holding n blocks of digitized voice data from the frequency-hopping receiver in a receiver data buffer;

estimating which of the n blocks of digitized voice data has a desirable signal quality; and

25

selecting and providing the block of digitized voice data having the desirable signal quality at an output terminal of the system.

30

13. A method for transmitting and receiving digitized voice signals in a frequency-hopping radio communication system, comprising the steps of:

collecting a block of digitized voice data in a transmitter data buffer, where said digitized voice data has a certain bit rate ;

repeatedly transmitting the same block of digitized voice data n times at n times the certain bit rate where each transmission of the same block of digitized voice data is transmitted on a different carrier frequency, where said transmission means includes a frequency-

35

hopping transmitter, which transmits on the different predetermined carrier frequencies and which is modulated by the digitized voice data signals from the transmitter data buffer means, and which provides output transmitted signals;

- 5 providing the predetermined carrier frequency signals to the frequency-hopping transmitter with a transmitter frequency selector; receiving the output transmitted signals from the frequency-hopping transmitter with a frequency hopping receiver; providing predetermined frequency signals to the frequency-hopping receiver for receiving and demodulating the output transmitted signals from the frequency-hopping transmitter with a receiver frequency selector synchronized to the transmitter frequency selector;
- 10 holding n blocks of digitized voice data from the frequency-hopping receiver;
- 15 estimating which of the n blocks of digitized voice data has the best signal quality; and providing the block of digitized voice data having the best signal quality at an output terminal of the system.

- 20 14. The method of Claim 13 wherein the step of holding n blocks of digitized voice data from the frequency-hopping receiver includes the step of switchably connecting data buffers to the output terminal of the frequency-hopping receiver
- 25 15. The method of Claim 13 wherein the step of holding n blocks of digitized voice data from the frequency-hopping receiver includes the step of switchably connecting one of two data buffers to the output terminal of the frequency hopping receiver and the step of selecting
- 30 the block of digitized voice data having the best signal quality.
16. The method of Claim 13 including the steps of:
- determining when the receiver means receives an uncorrupted block of digitized voice data;
- 35 transmitting each block of digitized voice data as many times as are necessary to provide an acceptable quality for a received block

of digitized voice signals as long as the number of retransmissions does not exceed the increase in the channel bit rate; and

notifying the transmission means to discontinue further retransmissions of the same block of digitized voice data and for the
5 transmission means to remain idle until it is time to transmit the next block of digitized voice signals.

17. The method of Claim 13 wherein the step of estimating which of the n blocks of digitized voice data has the best signal quality
10 includes detecting errors in a received block of data.

18. The method of Claim 17 wherein the step of detecting errors includes detecting parity errors.

15 19. The method of Claim 13 wherein the step estimating includes the step of measuring the quality of a signal received by the receiver means.

20 20 The method of Claim 19 wherein the step of measuring the quality includes measuring edge jitter.

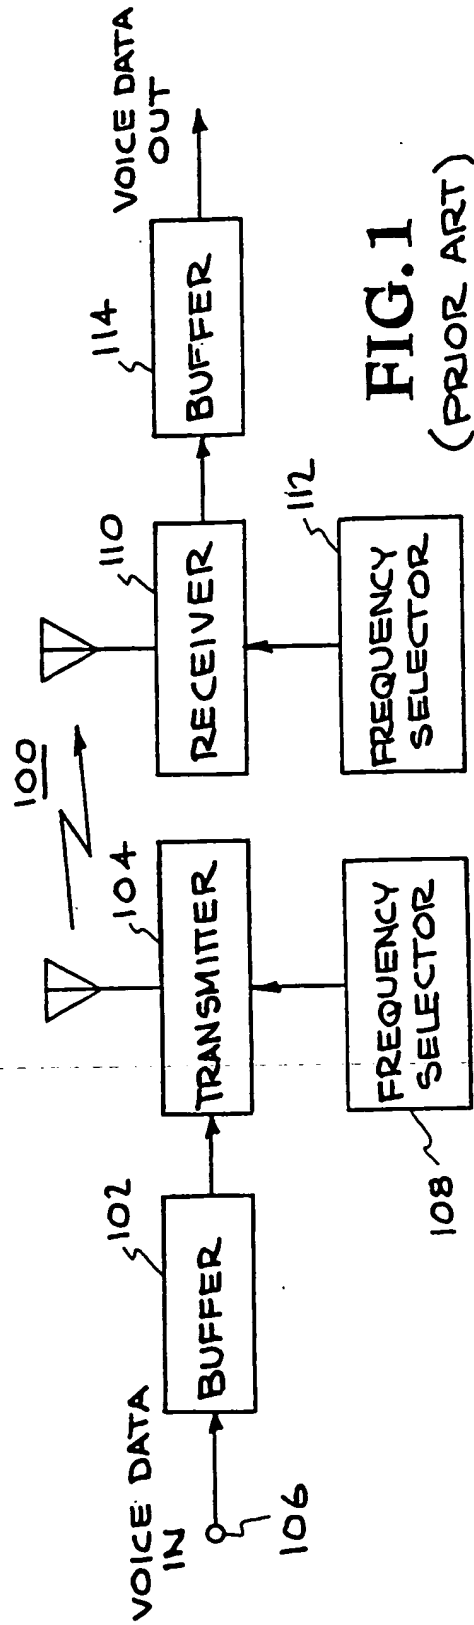


FIG. 1
(PRIOR ART)

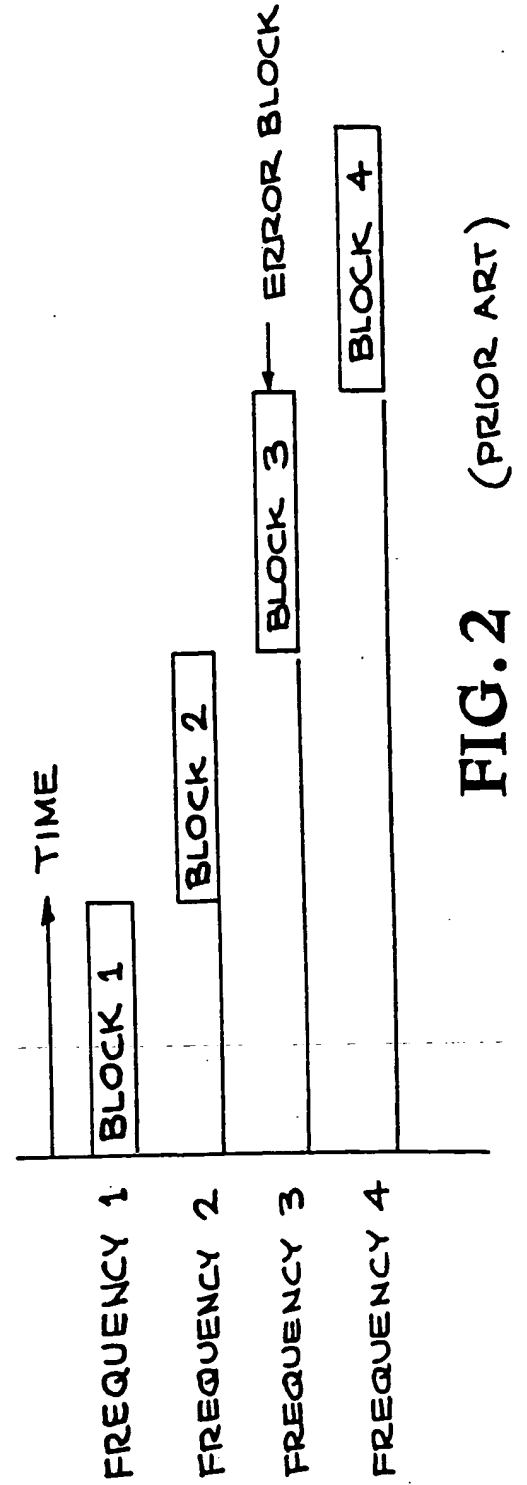


FIG. 2
(PRIOR ART)

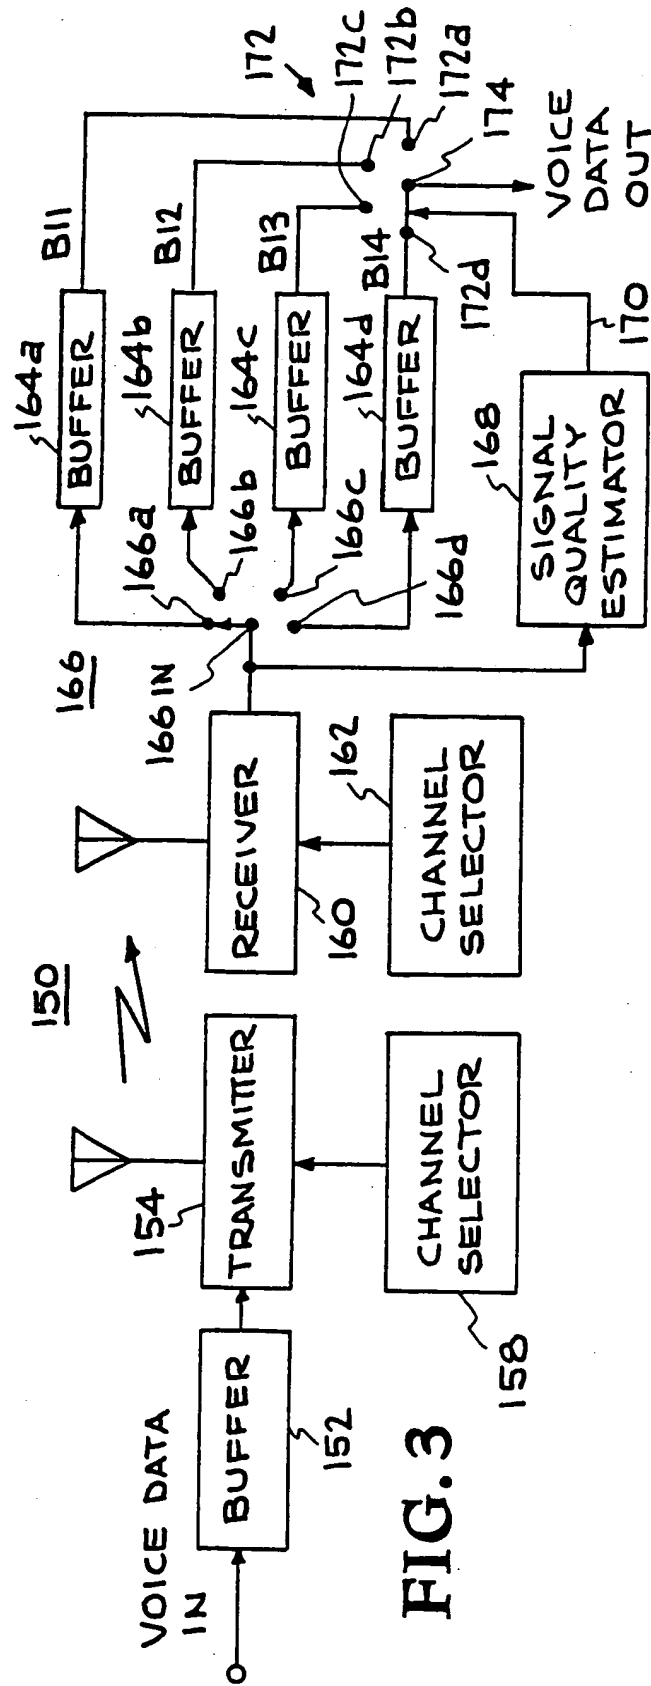


FIG. 3

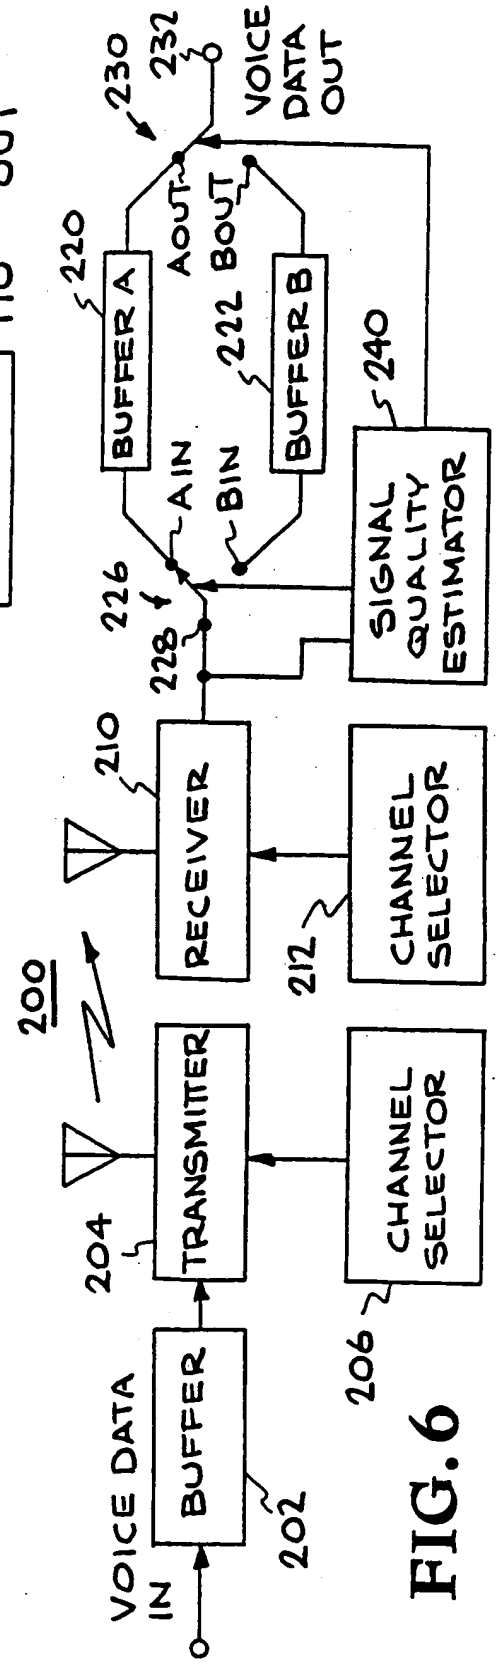


FIG. 6

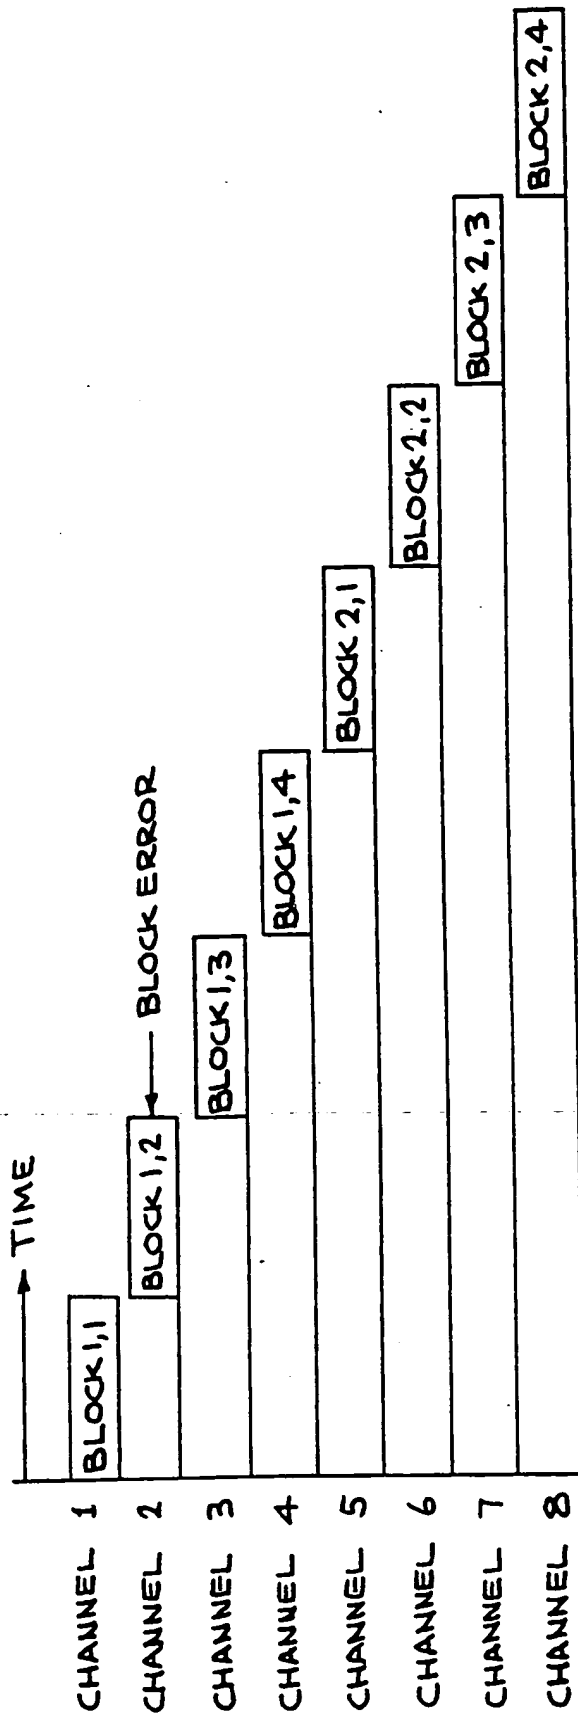


FIG. 4

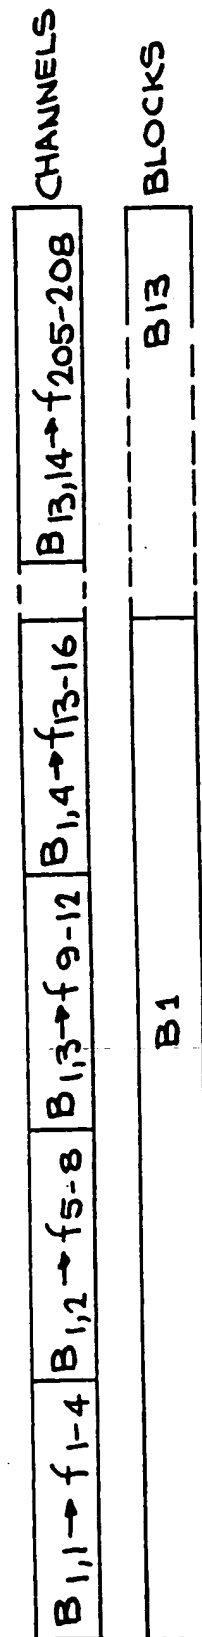


FIG. 5

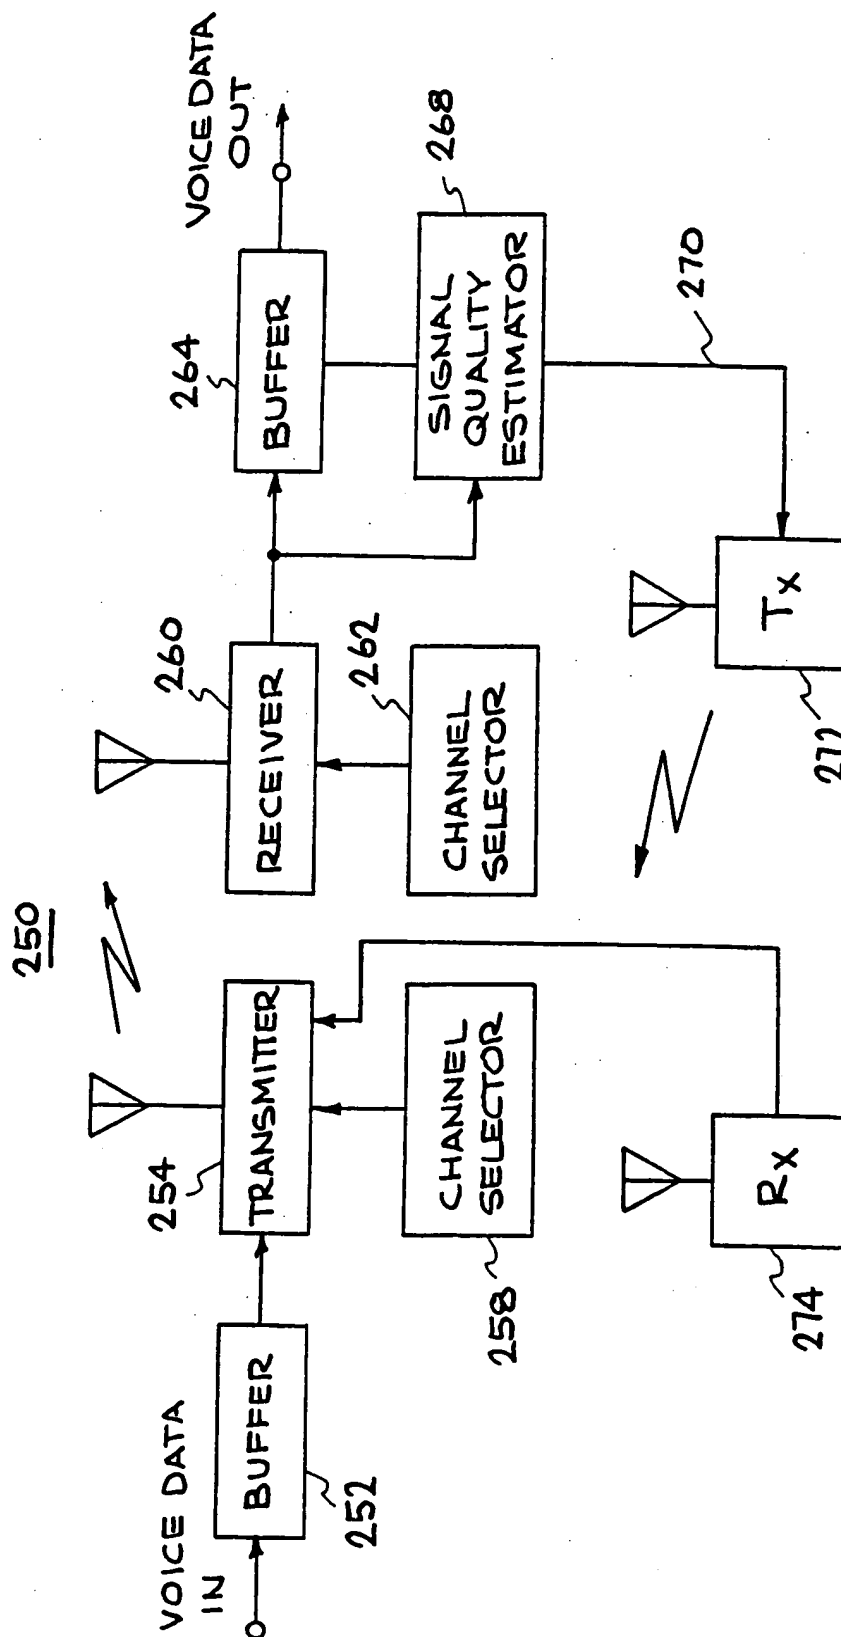


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 95/07379

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04B1/713

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB,A,2 239 768 (ROKE MANOR RESEARCH LIMITED) 10 July 1991	1,2, 11-13, 17,19 3,6,7,9, 16
A	see page 3, line 15 - line 19 see page 3, line 23 - line 26 see page 6, line 19 - line 24; figure 1 see page 7, line 24 - page 8, line 7 see page 10, line 7 - line 23 ---	
A	DE,A,27 47 454 (SIEMENS AG.) 24 September 1992 see page 2, line 29 - line 62 -----	1,2,6, 11-13,16

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

28 August 1995

Date of mailing of the international search report

25.09.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Bossen, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 95/07379

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-2239768	10-07-91	NONE	
DE-A-2747454	24-09-92	FR-A- 2682840	23-04-93